


TOTOKU

Flexible Flat Cable

Flexible Flat Cable
Leafconn

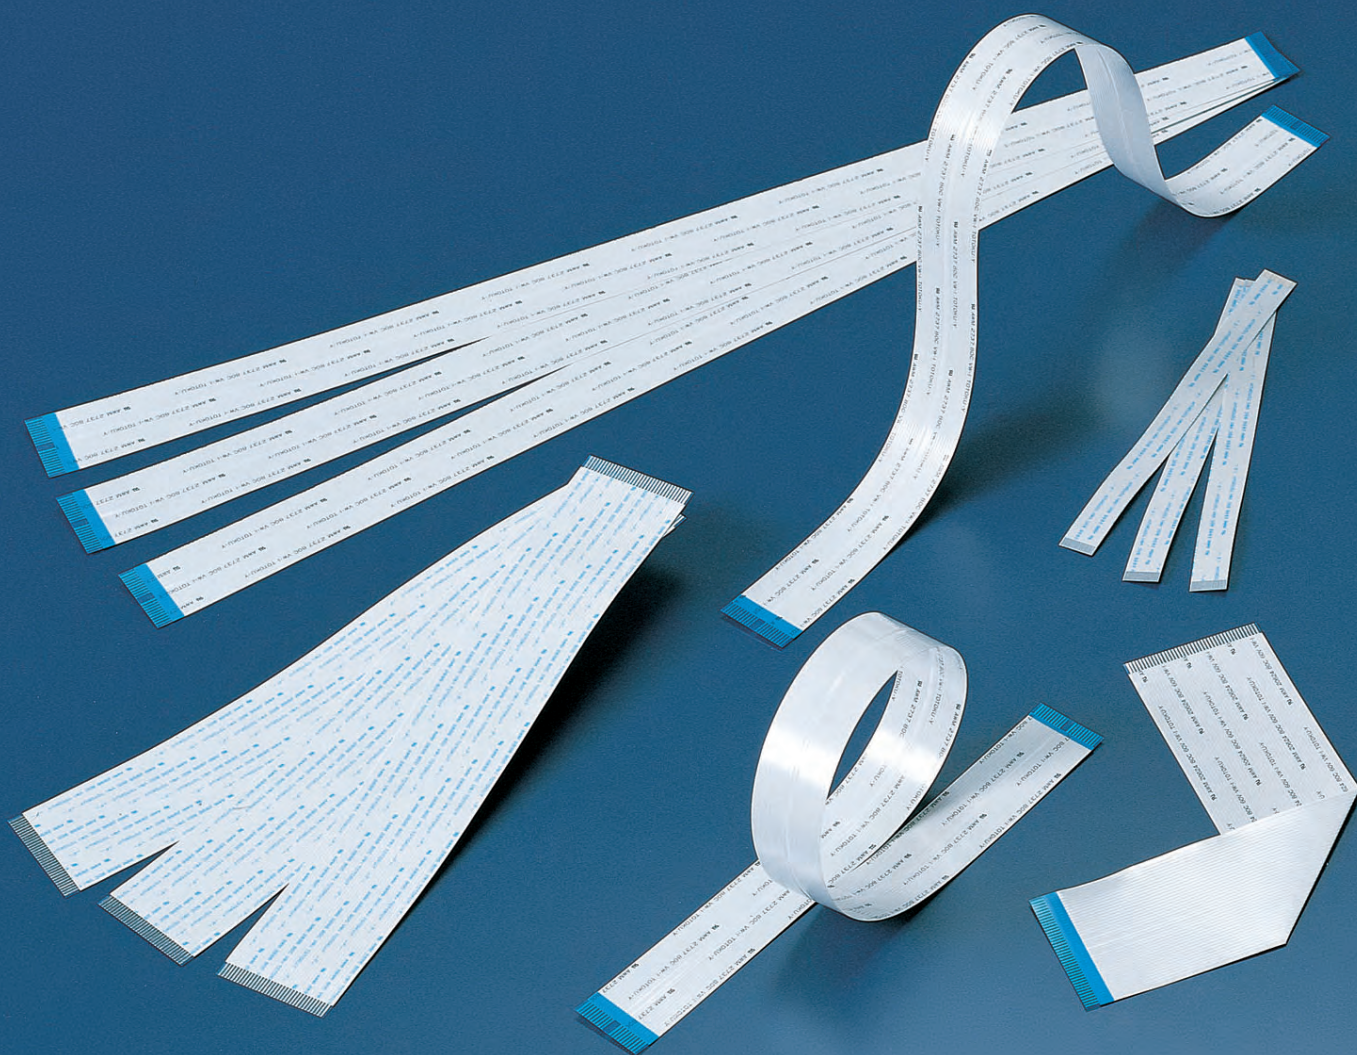

Flexible Flat Cable **Leafconn**

Flexible flat cable is the best cable for connecting internal connects electronic apparatus by pillared and tin wiring
Highly flexibility and good durability

Leafconn is registered trademarks of TOTOKU INC. Flexible Flat Cable

Features

- They are optimal wiring materials for signal transmission and power supply within electric and electronic devices requiring lighter products and reduced space.
- Products with any desired length (note-1) and number of cores can be easily produced.
(note-1) Length from 30mm to 10,000mm.
- Can be bent to any desired shape for use.
- Suppress the whiskers and prevent short circuiting of narrow pitch.
- UL certification
LEAFCONN complies with UL standards.
Flame retardant grade complies with VW-1.


Merit

- Excellent elastic behavior able to withstand repeated bending.
- Can be use on movable part such as printers and scanners.
- Small wiring space requirements, for improved mounting density.
- By adding a shield, it can be used for equipment which requires noise processing.
- By shielding, it is possible to protect equipment from the noise.

Standard specification


- Pitch: 0.5mm~1.25mm
- No. of conductors: Min 1 pin
- Plating: Tin, Gold
- Heat-resistance: 80°C, 105°C

Can do it for example



Coloring tape

Standard: White Picture Black




Laminating disparate conductors



Slit processing

Reduce the numbers of insert and unplug




Multilayer

Contributes to multi-signal transmission




Ultra-lightweight conductor

Weight saving




Laminating round wire



Shielding

Measure against noise



Wide range conductors

For high current

Impedance matching



Features

- These products are ideal for high-speed signal transmission compliant with the next-generation high-speed interface standard "V-by-One US®" (note-1).
- (note-1) V-by-One US® is a registered trademark of THine Electronics, Inc.

Merit

- High-definition image signals such as 8K images can be transmission by ultra-thin cables.
- Possible High-speed signal transmission within the server.
- Can be possible to adjust impedance that required.

Standard specification

- Pitch : 0.5mm
- Plating : Gold
- Heat-resistance : 80°C, 105°C
- Impedance (Differential) : 85~100ohm



Impedance matching + High heat resistance



Features


- High heat resistance cable with impedance matching.
- High-speed signal transmission allows some equipment especially hot area.
- Able to connecting at the hot area with high-speed signal transmission.

Merit

- Possible to internal connecting with high-speed signal transmission around high temperatures area.
- Possible to adjust any impedance which your request.

Standard specification

- Pitch : 0.5mm
- Plating : Gold
- Heat-resistance : 125°C



High heat resistance



Features

- High heat and humidity resistance (125°C 1008H) cables.
- Surface treatment is available for tin and gold plating.

Merit

- Possible to internal wiring around high temperatures area.

Standard specification

- Pitch : 0.5mm~1.25mm
- Plating : Tin, Gold
- Heat-resistance : 125°C



TOTOKU

株式会社 **TOTOKU**

本社 / 〒105-0003 東京都港区西新橋一丁目2番9号

営業部 第一営業グループ

TEL:03-5860-2128 FAX:03-5860-2136

西日本営業所 / 〒534-0024 大阪府大阪市都島区東野田町4-1-17

TEL:06-6352-3541 FAX:06-6354-0828

URL:[Japanese site] <https://www.totoku.co.jp/>

TOTOKU INC.

Head Office / 2-9, Nishi-Shinbashi 1-Chome, Minato-ku, Tokyo 105-0003 Japan

2nd Sales Section, Sales and Marketing Department

TEL:+81-3-5860-2129 FAX:+81-3-5860-2136

West Japan sales office / 4-1-17, Higashinoda-machi, Miyakojima-ku, Osaka city, Osaka 534-0024 Japan

TEL:+81-6-6352-3541 FAX:+81-6-6354-0828

URL:[English site] <https://en.totoku.co.jp/>