


## High frequency probe card

Direct connection to IC

Direct connection to measuring instruments

### Structure / Specifications

Wiring pattern	high frequency signal ; ~8-pair differential connection power supply, etc. ; ~40 pin
Size	(L)X(W)X(H) ; 100mmx100mmx20mm
Measurement object	minimum inter-electrode distance ; 150μm

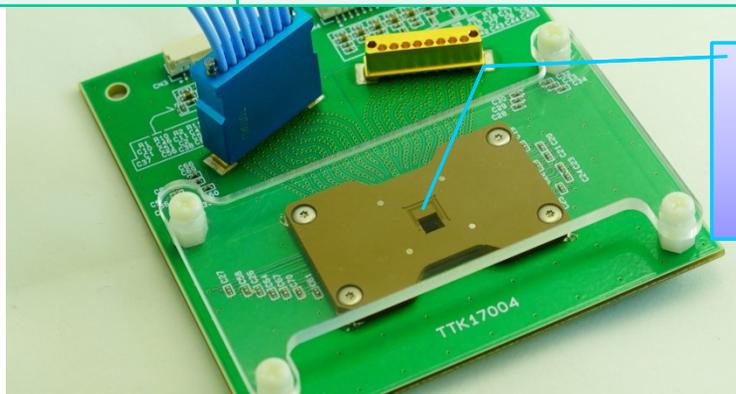

It is possible to measure high frequencies according to the object to be measured. Please contact us first.

### Electrical properties

InsertionLoss	Fig.1 (Sdd21)
Eye Pattern	Fig.2 (25Gbaud PAM4)

