




Thinner, lighter, smaller, smarter connection

# Flexible Wiring


Wiring of ultra-fine metal wires  
to flexible resin film

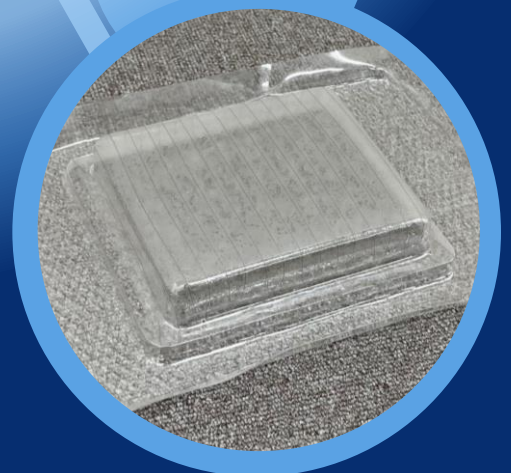

# Flexible Wiring

## Feature

Ultrafine metal wires can be freely wired to a flexible resin film.  
It can also be used on curved surfaces.

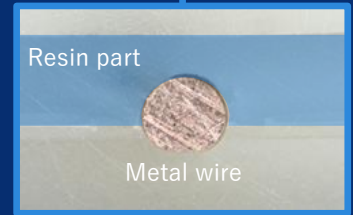

## Specification

Metal diameter	$\Phi 0.05 \sim 0.14$ mm
Wiring Pitch	Min. 2 mm
Film thickness	0.27~1.0 mm
Film size	Max. 300 × 300 mm
Film hue	Transparent or Translucent

## Ex. Film heater

Film heater that does not obstruct the background can be fabricated by wiring and embedding heater wires in a transparent film.

